




APX-3324A

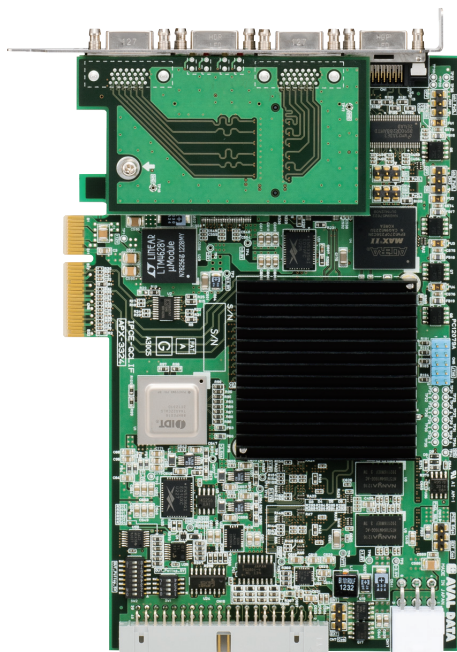

The rear panel of the APX 3324 features four channels, each with a connector and two status LEDs. Channel 1 (Ch1) has a connector on the left. Channel 2 (Ch2) has a connector on the right. Channel 3 (Ch3) has a connector on the left. Channel 4 (Ch4) has a connector on the right. Status LEDs are labeled Status1, Status2, Status3, and Status4. The text 'APX 3324 ANAL DATA' is printed on the right side of the panel.

型名	APX-3324A
画像入力 I/F	◎ CameraLink Base Configuration 4ch ◎ SDR26 ピンコネクタ 4 個搭載 ◎ エリア、ラインカメラ対応 ◎ サンプリングクロック 85MHz ◎ 画像データ RGB カラー：24bit モノクロ：8bit(1 ～ 3tap)/10 ～ 12bit(1 ～ 2tap)
PoCL	対応（SafePower は準拠せず）
MEGA-FIFO	DDR2-SDRAM 512MB
画像処理	Tap 並び替え+ライン反転
同期出力	カメラ制御信号：CC1 ～ CC4 汎用出力：8ch、ストロボ：4ch（TTL/ オープンコレクタ）
同期入力	外部トリガ：TTL/ オープンコレクタ / 差動信号 RS-442 エンコーダ：差動信号 RS-422(ラインドライバ)、A/B/Z 相、1MHz（MAX） 汎用入力：4ch（フォトカプラ）
システム bus	× 4 PCI-Express2.0 Gen2（5.0GT/S）
割り込み	画像入力開始、DMA 終了、GPIN 等
電源	+12V
使用環境	動作温度：0 ～ 50℃、湿度：35%～ 85%（無結露）
外形寸法	168mm × 111mm（PCI ハーフサイズ 1 スロット）
対応 OS	Windows
ソフトウェア（オプション）	開発キット：SDK-AcapLib2
環境対応	RoHS